

Pompa de caldura pentru piscina

CE-LRSJ-120
CE-LRSJ-140

Ambient: -7°C~43°C



Avantaje

- Temperatura apei: 10°C~35°C,
- Incalzire si racire,
- Automatizare cu display LCD,
- Compresor de inalta eficienta,
- Functia dezghetare automata,
- Schimbator de caldura din Titan,

■ Domeniu de functionare

racire apa	temperatura exterioara	15°C~43°C
incalzire apa	temperatura exterioara	-7°C~38°C

■ Alegerea aparatului

Putere termica (kW)	12	14
Volum piscina (m ³)	60-85	75-100

Schimbator de caldura din Titan



Titanium

Conventional
material

■ Pompa de caldura pentru piscina


Model			LRSJ-120/NYN1	LRSJ-140/NYN1
Alimentare electrica		Ph-V-hz	1-230-50	
Modul incalzire	water outlet Temp	°C	Presetata 28°C, 20°C~35°C	
Modul recire	water outlet Temp	°C	Presetata 28°C, 10°C~30°C	
Curent maxim		A	13.7	16.0
Incalzire	Putere termica	kW	12.0	14.0
	Putere electrica	kW	2.40	2.55
	Temperatura exterioara	°C	-7°C~38	
	COP	kW/kW	5.00	5.49
Racire	Putere termica	kW	8.4	10.4
	Putere electrica	kW	2.4	2.9
	Temperatura exterioara	°C	15°C~43	
	COP	kW/kW	3.5	3.6
Unitate exterioara	Dimensiuni (W×H×D)	mm	1,050×855×315	1,050×855×315
	Ambalaj (W×H×D)	mm	1,160×980×410	1,160×980×410
	Greutate neta / totala	Kg	75/85	75/85
Putere electrica max. absorbita		kW	3.3	3.75
Nivel de zgomot		dB(A)	58	58
Tip refrigerant / Cantitate		Kg	R410A/1.6	R410A/1.85
Racorduri hidraulice	Material schimbator		Titanium-tube	
	Intrare apa	mm	DN50	DN50
	Iesire apa	mm	DN50	DN50
	Racord condens	mm	DN25	DN25
	Presiune maxima	MPa	0.4	0.4
Volum piscina		m ³	60~85	75~100
Debit de apa		m ³ /h	5.2	6.0

Conditii de testare:

Incalzire: temperatura exterioara 24/19°C(DB*/WB), temperatura intrare apa 27°C, temperatura iesire apa 29°C,

Racire: temperatura exterioara 35/24°C(DB*/WB), temperatura intrare apa 27°C,

*Dry bulb - temperatura exterioara a aerului.

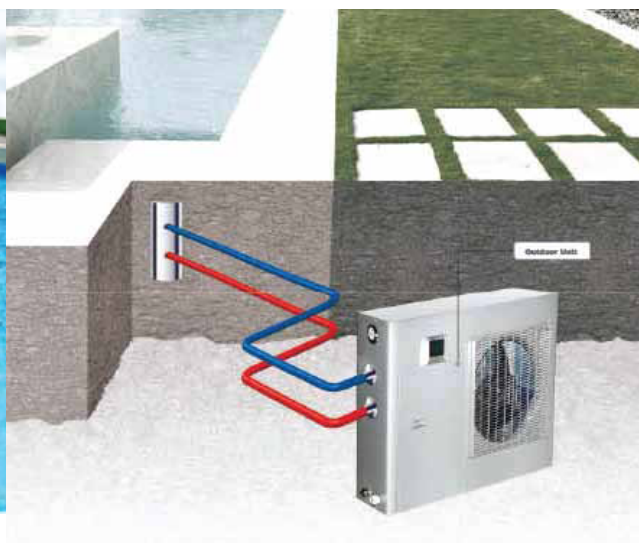

Distribuitor:

